Measuring Guide for Sliding Panels



Choose a Mount Type: Inside Mount or Outside Mount


(See next page if you need help deciding which mount is best for your windows.)

Inside Mount Window treatments are installed inside the window casing. Casing Molding Depth Width Height

- **Measure Depth:** See chart on next page to determine if window casing has enough depth for an inside-mount window treatment.
- **Measure Width:** Measure the inside width of window casing in three places. Record narrowest measurement.
- **Measure Height:** Measure the inside height from the top of window casing to top of sill (or to the floor for patio doors) in three places. Record shortest measurement.

Note: Do not take any deductions for clearance. The manufacturer will take necessary deductions for a perfect fit.

Outside Mount Window treatments are installed outside the window casing. Mount directly to wall or molding.

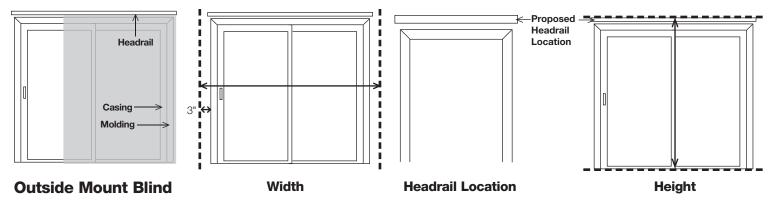

- Measure Width: Measure width to be covered. We recommend 3" overlap on each side (6" total) for optimum light control and privacy. Record measurement. If you want the entire window uncovered when the shade is fully open, you will need to add more than 3" to the width. See information on bottom of page 2.
- **2 Determine Headrail Location:** Determine headrail mounting position and mark the spot.
- **Measure Height:** Measure height to be covered from top of headrail location to bottom edge or top of sill if there is one. Record measurement. Allow 3" for adequate mounting area above the window. If shade extends to the floor (i.e. to cover a patio door), measure height from the headrail to the floor, and deduct ½" for Roller, Solar and Roman Shade fabrics, or 1" for Natural Shade materials in order for the panels to clear the floor.

Note: The manufacturer makes NO deductions on outside-mount installations.



Mounting Considerations

Reason for Choosing Inside Mount

Clean Look

- Inside-mount treatments are installed inside the window casing, showcasing attractive window molding.
- The window opening frames the treatment for a finished, clean appearance.

Allows Sill Space on Deep Windows

 In some deep-set windows, the window treatment can be installed to allow plants or other items to be placed in front of the window treatment on the sill.

Limitations of Inside Mount

Light Gaps

 A small deduction in the width and/or length is taken at the manufacturer to allow for proper operating clearance. This may cause a small gap on each side of the treatment, affecting the treatment's ability to darken a room.

Obstructed View

 The stack of panels will obstruct part of the view from the window when fully opened. The amount of stack varies by number of panels.

Architectural Obstacles

 Obstacles such as handles and cranks can interfere with the operation of inside-mount treatments.

Reason for Choosing Outside Mount

Improve Privacy and Light Control

 Light gaps on the side of the window treatment can be substantially diminished or eliminated.

Fewer Installation Limitations

- Outside-mount window treatments are ideal for covering non-square windows.
- Outside-mount window treatments can be configured so panel stack is to the side of window opening for an unobstructed view when fully open.

Architectural Obstacles

 Outside-mount window treatments can clear obstacles like handles and cranks.

Enlarge the Look of a Small Window

• Increase overlap above and below or to each side of the window.

Hide Window Trim


• Outside-mount treatments can easily hide unattractive window trim.

Limitations of Outside Mount


Required Surface Above Window Frame


 Outside-mount brackets require at least 2" of flat surface above your window or on the window frame for mounting brackets;
 Projection brackets can be ordered if needed to clear frame or molding.

Inside Mount Window Casing Minimum Depth Requirements

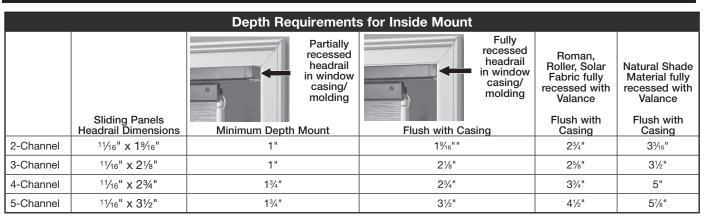

If you want the stack completely outside the window opening, please review the stack chart. http://www.springswindowfashions.com/SwfShared/pdf/ordering/101834_slidingpanels_co_selection_chart.pdf







Measuring and Ordering Worksheet

Window #1	Window #2	Window #3
(location)	(location)	(location)
Measuring	Measuring	Measuring
For Inside Mount	For Inside Mount	For Inside Mount
Depth of window casing:	Depth of window casing:	Depth of window casing:
Measure width of window in 3 places and circle the narrowest width below:	Measure width of window in 3 places and circle the narrowest width below:	Measure width of window in 3 places and circle the narrowest width below:
Width #1:	Width #1:	Width #1:
Width #2:	Width #2:	Width #2:
Width #3:	Width #3:	Width #3:
Measure height of window in 3 places and circle the shortest height below:	Measure height of window in 3 places and circle the shortest height below:	Measure height of window in 3 places and circle the shortest height below:
Height #1:	Height #1:	Height #1:
Height #2:	Height #2:	Height #2:
Height #3:	Height #3:	Height #3:
For Outside Mount	For Outside Mount	For Outside Mount
Width:	Width:	Width:
Height:	Height:	Height:
Ordering	Ordering	Ordering
Mount Type: □Inside □Outside	Mount Type: □Inside □Outside	Mount Type: □Inside □Outside
Ordering Width:	Ordering Width:	Ordering Width:
Ordering Height:	Ordering Height:	Ordering Height:
Type of Blind or Shade:	Type of Blind or Shade:	Type of Blind or Shade:
Style Name:	Style Name:	Style Name:
Color Number:	Color Number:	Color Number:
Controls & Options to consider:	Controls & Options to consider:	Controls & Options to consider:
☐ Cord Control	☐ Cord Control	☐ Cord Control
☐ Wand Control	☐ Wand Control	☐ Wand Control
☐ Draw/Stack Position:	☐ Draw/Stack Position:	☐ Draw/Stack Position:
☐ Cornice:	☐ Cornice:	☐ Cornice:
☐ Valance:	☐ Valance:	☐ Valance:
☐ Other:	☐ Other:	☐ Other: